



EuroP2P
Quick Guide

Manual Version: V2.02

Disclaimer

- Best effort has been made to verify the integrity and correctness of the contents in this manual, but no statement, information, or recommendation in this manual shall constitute formal guarantee of any kind, expressed or implied. We shall not be held responsible for any technical or typographical errors in this manual. The contents of this manual are subject to change without prior notice. Update will be added to the new version of this manual.
- Use of this manual and the product and the subsequent result shall be entirely on the user's own responsibility. In no event shall we be liable to you for any special, consequential, incidental, or indirect damages, including, among others, damages for loss of business profits, business interruption, or loss of data or documentation, or product malfunction or information leakage caused by cyber attack, hacking or virus in connection with the use of this product.
- The illustrations in this manual are for reference only and may vary depending on the version or model. The screenshots in this manual may have been customized to meet specific requirements and user preferences. As a result, some of the examples and functions featured may differ from those displayed on your monitor.
- Due to uncertainties such as physical environment, discrepancy may exist between the actual values and reference values provided in this manual. The ultimate right to interpretation resides in our company.

Conventions

Convention	Description
Boldface font	Commands, keywords, parameters and GUI elements such as window, tab, dialog box, menu, button, etc.
<i>Italic font</i>	Variables for which you supply values.
>	Separate a series of menu items, for example, Device Management > Add Device .

Contents

1 Introduction	1
Overview	1
Typical Networking	1
Networking 1	1
Networking 2	1
Network Connection	2
2 Web	2
Sign Up and Log In	2
Add a Device	3
Add an Organization	4
Retrieve Device Password	5
Access an Online Device	5
Share an Online Device	5
Devices Shared to Me	6
View Sharing Records	6
Change Personal Information	6
Change Password	7
View Login Records	7

1 Introduction

Overview

The general solution, based on the cloud servers, mobile surveillance clients, and smart terminal devices, employing the technologies of cloud computing, mobile Internet and big data, aims to offer smart, comfortable and secure information services to small and medium-sized enterprises.


Typical Networking

The following illustrations show some typical networking scenarios.

- Clients include mobile client and Web client (P2P Web).
- Devices include IP Camera (IPC) and Network Video Recorder (NVR).


Networking 1

Devices are connected to the Internet by connecting to a router behind another one; devices and clients are in different LANs.

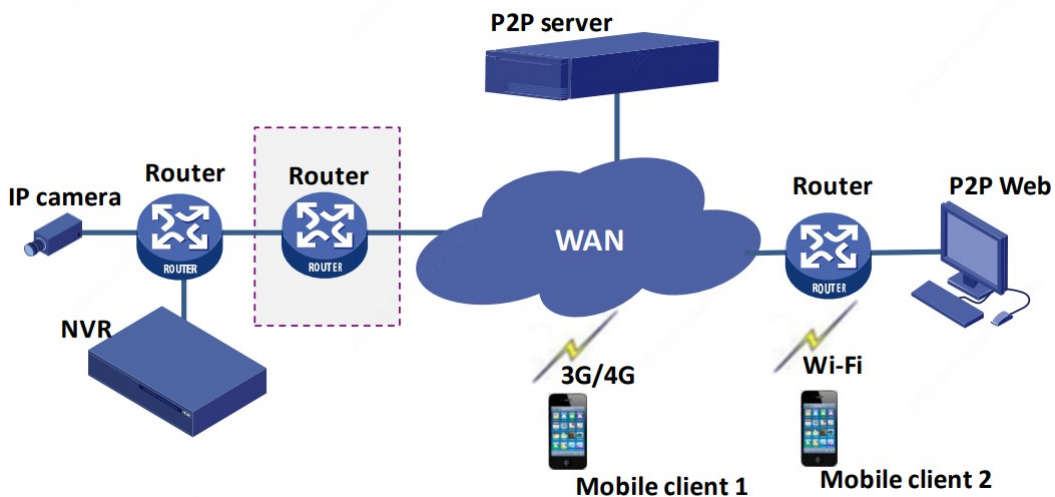

Networking 2


Devices in different LANs are connected to the Internet via a router; clients are connected to the Internet via cellular data or Wi-Fi.

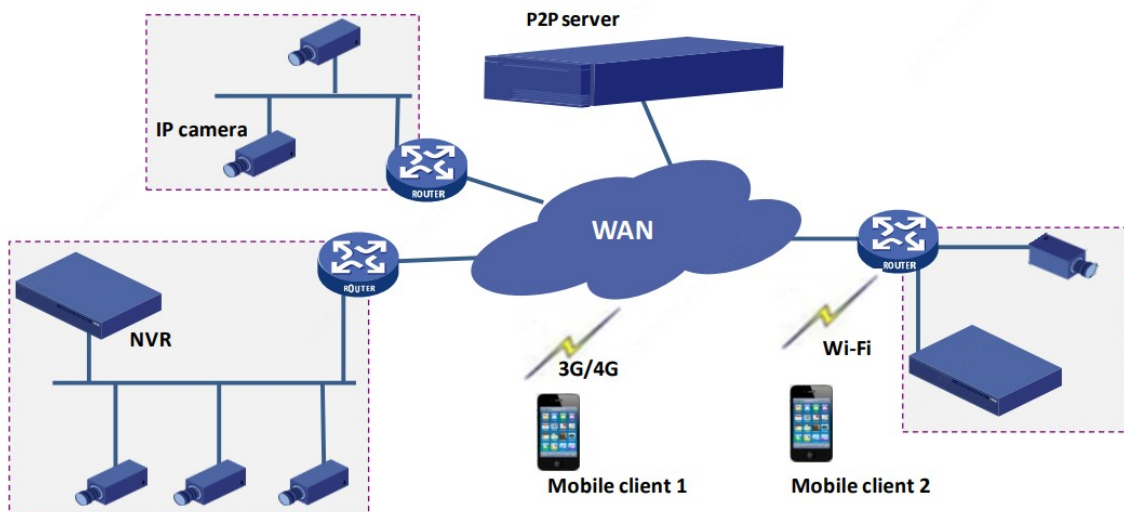

Network Connection

Connect devices and the router with network cables, and connect the router to the Internet.
Connect the mobile phone to the Internet via Wi-Fi or cellular data.

This illustration is for reference only.

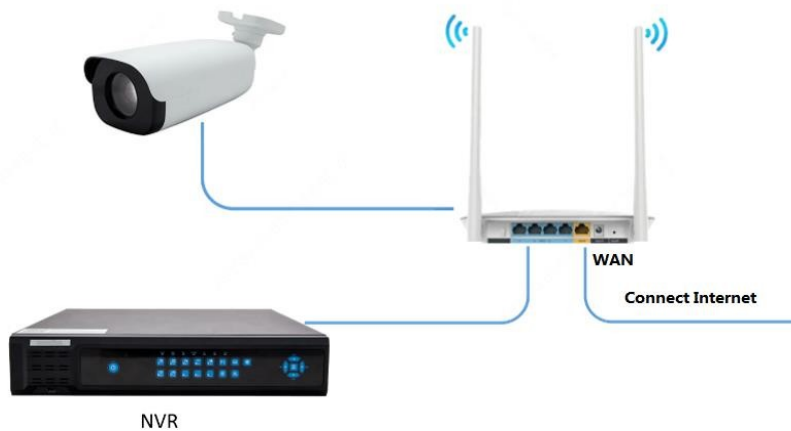

2 Web

Sign Up and Log In

Sign up for a cloud account. With a cloud account you can add devices to cloud and view live video and playback remotely, for example, on a mobile phone.

1. Open your Web browser, go to <http://www.EuroP2P.com> and then click **Sign up** in the upper right corner.
2. Complete the settings to sign up. You are logged in when sign-up is complete.

*Username:

*Password:

*Confirm:

*Email:

*Verification Code:

I agree [Service Agreement](#)

I agree to receive service information



NOTE!

- If you forgot your password, click **Forgot Password** in the login page, and follow the instructions to reset password.
- The cloud account you signed up on the cloud website can also be used on the app.

Add a Device

Add a device to bind it to your cloud account.

1. On the **Device List** page, click . The **Add Device** page is displayed.
2. Enter the register code and device name (on the cloud).

Register Code:

Device Name:

Org Name:



NOTE!

- The register code is displayed on the device's Web interface (also on NVR's local interface).
- For security, a device can be bound to one cloud account only, and it cannot be bound to another cloud account before the current binding is cancelled.


3. Click **Add**. The device appears under **My Cloud Devices**.




NOTE!


To delete a device, select the device in the device list and then click .

Example: my cloud device

My Cloud Devices 											
Select	No.	Org	Device Name	Device Type	Device IP	Latest Online Time	Status	Share Device	Change Device	Retrieve Password	Access Device
<input type="checkbox"/>	1	root	test	IPC	206.10.251.12	2018/2/6 11:25:30	Online(NAT)	Share	Change	Retrieve	Access


all / inverse 1 in total |  per page 10 ▾


The following operations are available on this page:

- To delete device(s), select device(s) in the list and then click .
- To modify device name or the organization it belongs to, click **Change**.



Add an Organization


Add organizations, and then you can add devices to organizations for unified management.

1. Click . The **Add Org** page is displayed.
2. Select an organization to which the new organization belongs. Enter a name for the new organization, and then click **Confirm**. The new organization appears on the **Org List** page.

Upper Org Name: 


Org Name:



 

3. Click . Enter the register code, device name (on the cloud), select the organization, then click **Add**. The organization appears on the **Org Info List**.

Register Code:



Device Name:

Org Name: 




NOTE!

Click  to change an organization name; click  to delete an organization. An organization that contains device(s) cannot be deleted.

Retrieve Device Password

Use this function to get a temporary password if you forgot your device password. This function is only available for online devices.

1. Click **Retrieve**.
2. Click **Acquire**. The verification code will be sent to the email address you used to sign up.
3. Enter the verification code, and click **Retrieve**. A temporary password will be displayed. Use the password to log in to your device.

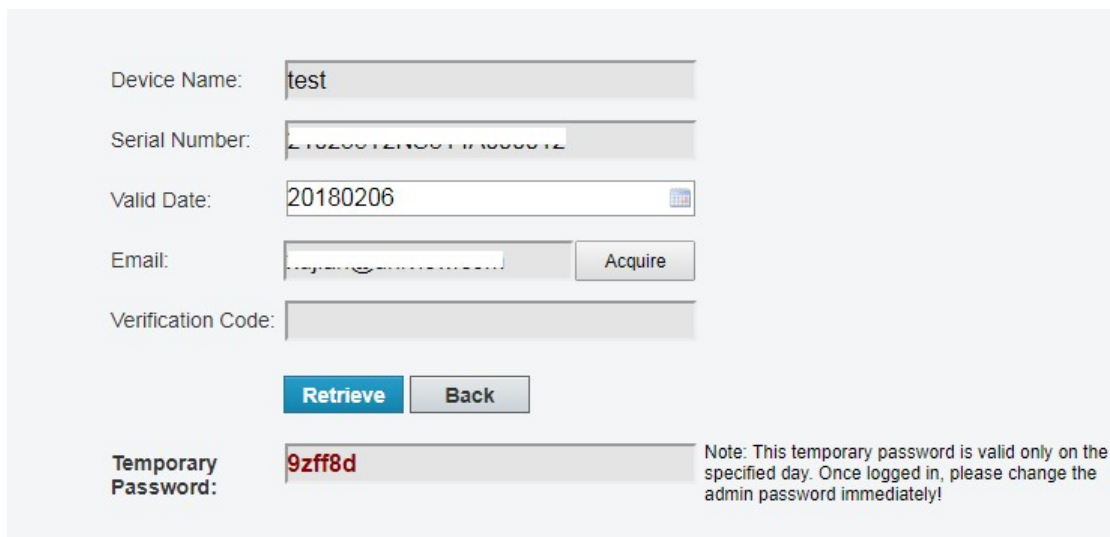

The screenshot shows a web form for retrieving a device password. The form fields are: Device Name (test), Serial Number (XXXXXXXXXXXXXXXXXXXX), Valid Date (20180206), Email (XXXXXXXXXXXX@XXXXXX.XX), and Verification Code (empty). There are buttons for 'Acquire', 'Retrieve', and 'Back'. The 'Temporary Password' field displays '9zff8d'. A note states: 'Note: This temporary password is valid only on the specified day. Once logged in, please change the admin password immediately!'

Access an Online Device

Click **Access** to access the Web interface of an online device.

Share an Online Device

Click **Share** to share an online device with another cloud account. Set a valid period and permissions for the sharing. The permissions are configured on the device.

Device Name:

Share To:

Valid Till:

User Rights:


Description:

Devices Shared to Me

View, edit and access the devices shared by other cloud accounts.

Shared Cloud Devices										
Select	No.	Org	Device Name	Device IP	Owner	Valid Until	Description	Status	Change Device	Access Device
<input type="checkbox"/>	1	root	NVR	61.164.52.169	jd	11/20/2019 12:00:00 AM		Online(NAT)	Change	Access

Perform the following operations as needed:

- Click **Change** to change device name and the organization it belongs to.
- Select the device(s) first and then click  to cancel the sharing. The devices disappear from the list after the sharing is canceled.
- Click **Access** to access the Web interface of an online device.

View Sharing Records

View the records of your cloud account sharing devices to other cloud accounts.

Sharing Records							
Select	No.	Device Name	Share To	Email	User Role	Valid Until	Description
<input type="checkbox"/>	1	Test200.200.200.19	hi 7	1 i@163.com	admin	11/20/2019 12:00:00 AM	



NOTE!

Deleting a sharing record will also stop sharing the device.

Change Personal Information

View or change your registered email address on the cloud website.

1. Click **Personal Information** under **Welcome** in the upper right corner.
2. Click **Change** and then follow the on-screen instructions to change the email address.

Change Password

Change the password of your cloud account. You need to re-log in after the password is changed.

1. Click **Change Password** under **Welcome** in the upper right corner.
2. Enter the current and the new passwords.

View Login Records

View login history of your cloud account.

1. Click **Show Log** under **Welcome** in the upper right corner.
2. The list shows information about the latest 10 logins, including time and IP address.